

# DH-HAC-HFW2241T-Z-POC

## 2MP Starlight HDCVI POC IR Bullet Camera

### HDCVI



- Starlight, 120dB True WDR, 3DNR
- Max. 30fps@1080P
- HD/SD switchable
- 2.7-13.5mm motorized lens
- Max. IR length 80m, Smart IR
- IP67, DC12V±30%



### System Overview

Experience 1080P full HD video and the simplicity of reusing existing coaxial infrastructure with HDCVI. The Starlight HDCVI camera with 120dB true WDR presents a high quality image with rich details even in extreme low-light conditions. This model is a PoC camera which can be powered by PoC XVR or PoC transmitter over a single coaxial cable with video, requiring no separate power supplies. PoC reduces installation time and costs, making it an ideal choice for applications with complex deployment but a tight budget.

### Functions

#### 4 Signals over 1 Coaxial Cable

HDCVI technology supports 4 signals to be transmitted over 1 coaxial cable simultaneously, i.e. video, audio\*, data and power. Dual-way data transmission allows the HDCVI camera to interact with the HCVR, such as sending control signal or triggering alarm. Moreover, HDCVI technology supports PoC for construction flexibility.

\* Audio input is available for some models of HDCVI cameras.

#### Long Distance Transmission

HDCVI technology guarantees long-distance and real-time transmission without any loss. It supports up to 800m for 1080P Full HD video via coaxial cable, and up to 300m via UTP cable. PoC power supply supports transmission distance up to 400m for 1080P via coaxial cable.\*

\*Actual results verified by real-scene testing in Dahua's test laboratory.

#### Simplicity

HDCVI technology inherits the born feature of simplicity from traditional analog surveillance system, making itself a best choice for investment protection. HDCVI system can seamlessly upgrade the traditional analog system without replacing existing coaxial cabling. The plug and play approach enables full HD video surveillance without the hassle of configuring a network.

#### Starlight

With the adoption of large sized high performance sensor, the camera is able to provide incomparable performance even under extreme lowlight environment. The starlight feature allows more details to be captured and accurate color to be recognized at night or in scenes with limited illumination.

#### Broadcast-quality Audio

Audio information is used as supplementary evidence in video surveillance applications. The HDCVI camera supports audio signal transmission over coaxial cable. In addition, it adopts unique audio processing and transmission technology that best restores source audio and eliminates noise, guaranteeing the quality and effectiveness of collected audio information.

#### Multiple-formats

The camera supports multiple video formats including HDCVI, CVBS, and other two common HD analog formats in the market. A DIP switch located on the cable allows you to quickly toggle formats, further simplifying installation and debugging. This feature makes the camera compatible with not only XVRs, but also most existing HD/SD DVRs.

\* PoC function is available only in HDCVI mode.

#### Wide Dynamic Range

Embedded with industry leading wide dynamic range (WDR) technology, vivid pictures are achieved even in the most intense contrast lighting conditions. True WDR (120dB) optimizes both the bright and dark areas of a scene at the same time to provide usable video.

#### Advanced 3DNR

3DNR is noise reduction technology that detects and eliminates random noises by comparing two sequential frames. Dahua's advanced 3DNR technology allows remarkable noise reduction with little impact to sharpness, especially under limited lighting condition. Besides, the advanced 3DNR effectively decreases the band width and saves the storage space.

#### Protection

The camera's outstanding reliability is unsurpassed due to its rugged design. The camera is protected against water and dust with IP67 ranking, making it suitable for indoor or outdoor environments.

Supporting ±30% input voltage tolerance, this camera suits even the most unstable power supply conditions. Its 4KV lightning rating provides protection against the camera and its structure from the effects of lightning.

## Technical Specification

## Camera

|                          |                                               |
|--------------------------|-----------------------------------------------|
| Image Sensor             | 1/2.8" CMOS                                   |
| Effective Pixels         | 1920(H)×1080(V), 2MP                          |
| Scanning System          | Progressive                                   |
| Electronic Shutter Speed | PAL: 1/4s~1/100,000s<br>NTSC: 1/3s~1/100,000s |
| Minimum Illumination     | 0.004Lux/F1.6, 30IRE, 0Lux IR on              |
| S/N Ratio                | More than 65dB                                |
| IR Distance              | Up to 80m (262feet)                           |
| IR On/Off Control        | Auto / Manual                                 |
| IR LEDs                  | 4                                             |

## Lens

|                      |                             |
|----------------------|-----------------------------|
| Lens Type            | Motorized lens / Fixed iris |
| Mount Type           | Board-in                    |
| Focal Length         | 2.7-13.5mm                  |
| Max Aperture         | F1.6                        |
| Angle of View        | H: 108.7°~28.7°             |
| Focus Control        | Auto / Manual               |
| Close Focus Distance | 200mm<br>7.87"              |

## DORI Distance

Note: The DORI distance is a "general proximity" of distance which makes it easy to pinpoint the right camera for your needs. The DORI distance is calculated based on sensor specification and lab test result according to EN 62676-4 which defines the criteria for Detect, Observe, Recognize and Identify respectively.

|           | DORI Definition   | Distance   |             |
|-----------|-------------------|------------|-------------|
|           |                   | Wide       | Tele        |
| Detect    | 25px/m (8px/ft)   | 44m(144ft) | 153m(502ft) |
| Observe   | 63px/m (19px/ft)  | 18m(59ft)  | 61m(200ft)  |
| Recognize | 125px/m (38px/ft) | 9m(30ft)   | 31m(102ft)  |
| Identify  | 250px/m (76px/ft) | 4m(13ft)   | 15m(49ft)   |

## Pan / Tilt / Rotation

|                   |                                                         |
|-------------------|---------------------------------------------------------|
| Pan/Tilt/Rotation | Pan: 0° ~ 360°<br>Tilt: 0° ~ 90°<br>Rotation: 0° ~ 360° |
|-------------------|---------------------------------------------------------|

## Video

|              |                                                                             |
|--------------|-----------------------------------------------------------------------------|
| Resolution   | 1080P (1920×1080)                                                           |
| Frame Rate   | 25/30fps@1080P                                                              |
| Video Output | 1-channel BNC high definition video output / CVBS video output (DIP switch) |
| Day/Night    | Auto (ICR) / Manual                                                         |

|                 |                 |
|-----------------|-----------------|
| OSD Menu        | Multi-language  |
| BLC Mode        | BLC / HLC / WDR |
| WDR             | 120dB           |
| Gain Control    | AGC             |
| Noise Reduction | 2D/3D           |
| White Balance   | Auto / Manual   |
| Smart IR        | Auto / Manual   |

## Certifications

|                |                                                                                                                                  |
|----------------|----------------------------------------------------------------------------------------------------------------------------------|
| Certifications | CE (EN55032, EN55024, EN50130-4)<br>FCC CFR 47 FCC Part 15 subpartB, ANSI C63.4-2014)<br>UL (UL60950-1+CAN/CSA C22.2 No.60950-1) |
|----------------|----------------------------------------------------------------------------------------------------------------------------------|

## Interface

|                 |     |
|-----------------|-----|
| Audio Interface | N/A |
|-----------------|-----|

## Electrical

|                   |                            |
|-------------------|----------------------------|
| Power Supply      | POC/12V DC ±30%            |
| Power Consumption | Max. 10.2W (12V DC, IR on) |
| Power Output      | 12V DC, Max.2W             |

## Environmental

|                                        |                                                                                                                                                                |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operating Conditions                   | -30°C ~ +60°C (-22°F ~ +140°F) / Less than 90% RH<br>*-30°C ~ +45°C (-22°F ~ +113°F) With 2W power output.<br>* Start up should be done at above -30°C (-22°F) |
| Storage Conditions                     | -40°C ~ +60°C (-40°F ~ +140°F) / Less than 90% RH                                                                                                              |
| Ingress Protection & Vandal Resistance | IP67                                                                                                                                                           |

## Construction


|              |                                           |
|--------------|-------------------------------------------|
| Casing       | Aluminium                                 |
| Dimensions   | 244.1mm×90.4mm×90.4mm (9.61"×3.56"×3.56") |
| Net Weight   | 0.79kg (1.74lb)                           |
| Gross Weight | 1.04kg (2.29lb)                           |

## Ordering Information

| Type        | Part Number                       | Description                                               |
|-------------|-----------------------------------|-----------------------------------------------------------|
| 2MP Camera  | DH-HAC-HFW2241TP-Z-POC 2.7~13.5mm | 2MP Starlight HDCVI POC IR Bullet Camera, PAL             |
|             | DH-HAC-HFW2241TN-Z-POC 2.7~13.5mm | 2MP Starlight HDCVI POC IR Bullet Camera, NTSC            |
| Accessories | PFA130-E                          | Junction box (For use alone or with PFA152-E pole mount)  |
|             | PFA152-E                          | Pole mount (For use with PFA130-E junction box)           |
|             | PFA151                            | Corner mount bracket (For use with PFA130-E junction box) |
|             | PFM811-4CH                        | POC transmitter (PSE end)                                 |
|             | PFM321                            | 12V 1A Power Adapter                                      |
|             | PFM320                            | 12V 2A Power Adapter                                      |
|             | PFM300                            | 12V 2A Power Adapter                                      |


## Accessories

Optional:

PFA130-E  
Junction boxPFA152-E  
Pole mountPFA151  
Corner mount bracketPFM811-4CH  
POC transmitter  
(PSE end)PFM321  
12V 1A Power  
AdapterPFM320  
12V 2A Power AdapterPFM300  
12V 2A Power Adapter


## Junction Mount

PFA130-E




## Corner Mount

PFA130-E + PFA151



## Pole Mount

PFA130-E + PFA152-E

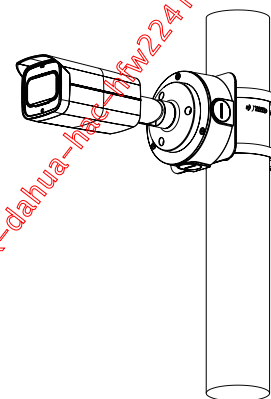

## Dimensions (mm/inch)

