

DS-7300HUHI-F4/N SERIES TURBO HD DVR

Features and Functions

Appearance Design

- Typical chassis design to guarantee the low noise and environmental protection of the device
- Front slot of DVD-R/W for more convenient installation and maintenance

Video Input and Transmission

- Connectable to HDTV, AHD and analog cameras
- Up to 6/10/18-ch 8 MP IP cameras input for DS-7304/7308/7316HUHI-F4/N
- Long distance transmission over UTP and coaxial cable

Compression and Recording

- One-key enable H.264+ compression to improve encoding efficiency by up to 50% and reduces data storage costs
- Full channel recording at up to 3 MP resolution
- Supports POS triggered recording and POS information overlay

Video Output

- Simultaneous HDMI1 and VGA output at up to 1920 × 1080 resolution, and independent HDMI 2 output at up to 4K (3840 × 2160) resolution
- Independent CVBS output improves compatibility at the most possibility and serves as the aux output or live view output only

Storage and Playback

- Four SATA interfaces (up to 6 TB capacity per HDD)
- Hot-swappable HDD supporting RAID 0, RAID 1, RAID 5, RAID 6 and RAID 10 storage scheme
- 4/8/16-ch synchronous playback
- Smart search for efficient playback
- Supports playback by main stream, or sub-stream for IP cameras
- Supports the 3rd party cloud storage (Dropbox/Google Drive/Microsoft OneDrive)

Smart Function

- Supports multiple VCA (Video Content Analytics) events for both analog and smart IP cameras
- Supports line crossing detection and intrusion detection of all channels
- Supports people counting and heat map functions for 1-ch analog camera
- VQD (Video Quality Diagnostics)
- Unlock pattern for device login for the *admin* and clear-text password available
- GUID file can be exported for password resetting and imported for finding the forgotten password
- Supports PTZ control via Omnicast VMS of Genetec protocol

Network & Ethernet Access

- Hik Cloud P2P & HiDDNS (Dynamic Domain Name System) for easy network management
- Two gigabit Ethernet network interfaces
- Output bandwidth limit configurable




Specifications

Model		DS-7304HUHI-F4/N	DS-7308HUHI-F4/N	DS-7316HUHI-F4/N	
Video/Audio input	Video compression	H.264+/H.264			
	Analog video input	4-ch	8-ch	16-ch	
	HDTVI input	3 MP, 1080p25, 1080p30, 720p25, 720p30, 720p50, 720p60			
	AHD input	720p25, 720p30, 1080p25, 1080p30			
	CVBS input	Support			
	IP video input		2-ch (up to 6-ch)	2-ch (up to 10-ch)	2-ch (up to 18-ch)
			Up to 8 MP resolution H.265/H.264+/H.264		
	Network bandwidth	200 Mbps		260 Mbps	
	Audio compression	G.711u			
	Audio input	4-ch, RCA (2.0 Vp-p, 1 K Ω)			
Video/Audio output	CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 \times 576, NTSC: 704 \times 480			
	HDMI1/VGA output	1-ch, 1920 \times 1080/60Hz, 1280 \times 1024/60Hz, 1280 \times 720/60Hz, 1024 \times 768/60Hz			
	HDMI2 output	1-ch, 4K (3840 \times 2160)/30Hz, 2K (2560 \times 1440)/60Hz, 1920 \times 1080/60Hz, 1280 \times 1024/60Hz, 1280 \times 720/60Hz, 1024 \times 768/60Hz			
	Encoding resolution	3 MP/1080p/720p/WD1/4CIF/VGA/CIF			
	Frame rate	Main stream: 3 MP@15fps; 1080p/720p/WD1/4CIF/VGA/CIF@25fps (P)/30fps (N)			
		Sub-stream: WD1/4CIF@12fps; CIF/QVGA/QCIF@25fps (P)/30fps (N)			
	Video bit rate	32 Kbps to 10 Mbps			
	Audio output	2-ch, RCA (Linear, 1 K Ω)			
	Audio bit rate	64 Kbps			
	Dual stream	Support			
	Stream type	Video, Video & Audio			
	Synchronous playback		4-ch	8-ch	16-ch
Network management	Remote connections	128			
	Network protocols	TCP/IP, PPPoE, DHCP, Hik Cloud P2P, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF, SNMP			
Hard disk	SATA	4 SATA interfaces			
	eSATA	Support			
	Capacity	Up to 6 TB capacity for each disk			
Disk array	Array type	RAID 0, RAID 1, RAID 5, RAID 6, RAID 10			
External interface	Two-way audio input	1-ch, RCA (2.0 Vp-p, 1 K Ω) (independent)			
	Network interface	2, RJ45 10M/100M/1000M self-adaptive Ethernet interface			
	USB interface	Front panel: 2 \times USB 2.0 Rear panel: 1 \times USB 3.0			
	Serial interface	RS-232, RS-485 (full-duplex), Keyboard			
	Alarm in/out	16/4			
General	Power supply	100 to 240 VAC			
	Consumption (without HDD)	\leq 35 W	\leq 45 W	\leq 65 W	
	Working temperature	-10 $^{\circ}$ C to +55 $^{\circ}$ C (14 $^{\circ}$ F to 131 $^{\circ}$ F)			
	Working humidity	10% to 90%			
	Dimensions (W \times D \times H)	445 \times 390 \times 70 mm (17.5 \times 15.4 \times 2.8 inch)			
	Weight (without HDD)	\leq 5 kg (11.0 lb)			

<https://www.e-camera.com/eng/Video-Recorder/Hikvision/Dvr-4-Channel-3MP-2-Channel-8MP-Hikvision-DS-7308huhi-f4-n/>

Physical Interfaces

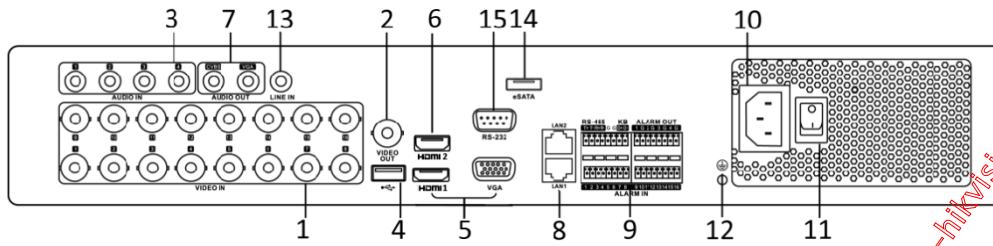

NOTE

The rear panel of DS-7304/7308HUHI-F4/N provides 4/8 video input interfaces

Index	Description	Index	Description
1	VIDEO IN	9	RS-485 Serial Interface, Keyboard Interface, ALARM IN and ALARM OUT
2	VIDEO OUT	10	100 to 240 VAC Power Input
3	AUDIO IN, RCA Connector	11	Power Switch
4	USB Interface	12	GND
5	HDMI1/VGA Interface	13	LINE IN
6	HDMI2 Interface	14	eSATA Interface
7	CVBS AUDIO OUT and VGA AUDIO OUT	15	RS-232 Serial Interface
8	LAN1 and LAN2 Network Interfaces		

Distributed by

Available Models

DS-7304HUHI-F4/N, DS-7308HUHI-F4/N, DS-7316HUHI-F4/N

HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Italy
T +39-0438-600000
info.it@hikvision.com

Hikvision Singapore
T +65-6754-4718
sg@hikvision.com

Hikvision Africa
T +27 (10) 0351172
sale.africa@hikvision.com

Hikvision Europe
T +31-23-55-42-770
info.eu@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Hong Kong
T +852-2151-1761

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision Korea
T +82-31-731-8841
sales.korea@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision UK
T +01628-902140
support.uk@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com