

# DS-7700NI-I4/P Series NVR



## Available Models

DS-7708NI-I4/8P, DS-7716NI-I4/16P, DS-7732NI-I4/16P

## Key Features

### Professional and Reliable

- Dual-OS design to ensure high reliability of system running
- ANR technology to enhance the storage reliability when the network is disconnected

### HD Input

- H.265/H.264/MPEG4 video formats
- Connectable to the third-party network cameras
- Up to 32 IP cameras can be connected
- Recording at up to 12 MP resolution
- Supports live view, storage, and playback of the connected camera at up to 12 MP resolution

### HD Output

- HDMI and VGA outputs provided
- HDMI Video output at up to 4K (3840 × 2160) resolution

### HD Storage

- Up to 4 SATA interfaces connectable for recording and backup
- Storage space effectively saved by 50% to 70% with the use of H.264+ decoding format


### HD Transmission

- 1 self-adaptive 10M/100M/1000M network interface
- 8/16 independent PoE network interfaces are provided

### Various Applications

- Centralized management of IP cameras, including configuration, information import/export, real-time information display, two-way audio, upgrade, etc.
- Connectable to smart IP cameras from Hikvision and the recording, playing back, and backing up of VCA alarms can be realized
- VCA detection alarm is supported
- Instant playback for assigned channel during multi-channel display mode
- Smart search for the selected area in the video; and smart playback to improve the playback efficiency
- Supports HDD quota and group modes; different capacity can be assigned to different channels

## Physical Interfaces

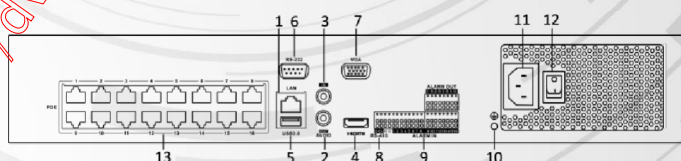

Index	Description
1	LAN Network Interfaces
2	AUDIO OUT
3	AUDIO IN
4	HDMI Interface
5	USB 3.0 Interface
6	RS-232 Serial Interface
7	VGA Interface
8	RS-485 Serial Interface
9	ALARM IN and ALARM OUT
10	GND
11	100~240VAC Power Input
12	Power Switch
13	Network Interfaces with PoE function (8 interfaces for DS-7708NI-I4/8P and 16 interfaces for DS-7716NI-I4/16P and DS-7732NI-I4/16P.)

<https://www.surveillance-ip.com/uri/Hikvision/DS-7708NI-I4/>

# DS-7700NI-I4 Series NVR



## Specifications

Model		DS-7708NI-I4/8P	DS-7716NI-I4/16P	DS-7732NI-I4/16P
Video/Audio input	IP video input	8-ch	16-ch	32-ch
		Up to 12 MP resolution		
	Two-way audio	1-ch, RCA (2.0 Vp-p, 1kΩ)		
Network	Incoming bandwidth	80 Mbps	160 Mbps	320 Mbps
	Outgoing bandwidth	160 Mbps		
	Remote connection	128		
Video/Audio output	Recording resolution	12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF		
	HDMI output resolution	4K (3840 × 2160)/60Hz, 4K (3840 × 2160)/30Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
	VGA output resolution	1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
	Audio output	1-ch, RCA (Linear, 1 KΩ)		
Decoding	Decoding format	H.265/H.264/MPEG4		
	Live view / Playback resolution	12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF		
	Synchronous playback	8-ch	16-ch	16-ch
	Capability	2-ch @ 4K, or 8-ch @ 1080p	4-ch @ 4K, or 16-ch @ 1080p	4-ch @ 4K, or 16-ch @ 1080p
Hard disk	SATA	4 SATA interfaces for 4HDDs		
	Capacity	Up to 6TB capacity for each HDD		
External interface	Network interface	1 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface		
	Serial interface	1 RS-485 (half-duplex), 1 RS-232		
	USB interface	Front panel: 2 × USB 2.0; Rear panel: 1 × USB 3.0		
	Alarm in/out	16/4		
POE Interface (for /P series NVR only)	Interface	8 RJ-45 10/100 Mbps self-adaptive Ethernet interfaces	16 RJ-45 10/100 Mbps self-adaptive Ethernet interfaces	
	Power	≤200W		
	Supported standard	IEEE 802.3 af/at		
General	Power supply	100 to 240 VAC		
	Power	≤300 W		
	Consumption (without hard disk)	≤20 W (without enabling PoE)		
	Working temperature	-10 to +55°C (14 to 131°F)		
	Working humidity	10 to 90 %		
	Chassis	19-inch rack-mounted 1.5U chassis		
	Dimensions(W × D × H)	445 × 390 × 70 mm ( 17.5" × 15.3" × 2.8")		
	Weight(without hard disk)	≤ 5 Kg (11 lb)		