


NVR1B04/1B08

4/8 Channel Smart 1U H.265 Network Video Recorder



- H.265+/H.264+ codec decoding
- Max 4/8 channel IP camera inputs
- Max 80Mbps incoming bandwidth
- Up to 8MP resolution preview & playback
- Up to 1ch@8MP/4ch@1080P decoding
- HDMI/VGA simultaneous video output



System Overview

EZ-IP is perfect for small to medium size applications like home/residential security, small retail shops, and other typical SMB applications. It offers a perfect alternative to migrate from analog to an IP system with its easy to use nature and cost effectiveness.

EZ-IP is fully in line with Dahua's quality. Stable and reliable components are utilized and Various tests such as anti-vibration, water resistance, and aging tests are performed to ensure Dahua quality standards.

Functions

4K Resolution

4K resolution is a revolutionary breakthrough in image processing technology. 4K delivers four times the resolution of standard HDTV 1080p cameras and offers superior picture quality and image details. 4K resolution improves the clarity of a magnified scene to view or record crisp forensic video from large areas.

Smart H.265+

Smart H.265+ is the optimized implementation of the H.265 codec that uses a scene-adaptive encoding strategy, dynamic GOP, dynamic ROI, flexible multi-frame reference structure and intelligent noise reduction to deliver high-quality video without straining the network. Smart H.265+ technology reduces bit rate and storage requirements by up to 70% when compared to standard H.265 video compression.

ANR (Automatic Network Replenishment Technology)

Network Video Recorders with the ANR function automatically store video data on an IP camera SD card when the network is disconnected. After recovery of the network, the NVR automatically retrieves the video data stored on the camera.

DMSS

The DMSS app is available on the iOS App Store and Google Play. It makes surveillance easy and simple, allowing you to remotely access NVR devices, view live video, receive event push notifications, and search for recorded videos from an iPhone, iPad, or Android phone at anytime from virtually anywhere.

<https://www.e-camera.ro/supraveghere-video/dvr-nvr-un/Dahua-nvr-4-canale-ip-2-mp-bitrate-80mbps-dahua-nvr1b04/>

Technical Specification

System

Main Processor	Dual-core embedded processor
Operating System	Embedded LINUX

Audio and Video

IP Camera Input	4/8 Channel
Two-way Talk	1 Channel Input, 1 Channel Output, RCA

Display

Interface	1 HDMI, 1 VGA
Resolution	HDMI: 3840×2160, 1920×1080, 1280×1024, 1280×720, 1024×768
	VGA: 1920×1080, 1280×1024, 1280×720, 1024×768
Decoding Capacity	1ch@8MP 30fps, 4ch@1080P 30fps
Multi-screen Display	4CH: 1/4
	8CH: 1/4/8/9
OSD	Camera title, Time, Camera lock, Motion detection, Recording

Recording

Compression	H.265+/H.264+
Resolution	8MP/6MP/5MP/4MP/3MP/1080P/ 720P/ D1&etc.
Record Rate	80Mbps
Bit Rate	16Kbps ~ 20Mbps Per Channel
Record Mode	Manual, Schedule(Regular(Continuous), MD, Stop
Record Interval	1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec

Video Detection and Alarm

Trigger Events	Recording, PTZ, Tour, Video Push, Snapshot, and Screen Tips
Video Detection	Motion Detection, MD Zones: 396 (22 × 18), and Tampering
Alarm input	N/A
Relay Output	N/A

Playback and Backup

Sync Playback	4CH: 1/4
	8CH: 1/4/9
Search Mode	Time /Date, MD and Exact Search (accurate to second)
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Backup Selection, Digital Zoom
Backup Mode	USB Device/Network

Third-party Support

Third-party Support	Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, and more
---------------------	---

Network

Interface	1 RJ-45 port (10/100Mbps)
Ethernet Port	1 Independent 100Mbps Ethernet Port
PoE	N/A
Network Function	HTTP/HTTPS, TCP/IP, IPv4/IPv6, RTSP, UDP, NTP, DHCP, DNS, IP Filter, DDNS, IP Search(Support Dahua IP camera, DVR, NVS and etc.), P2P
Optical Fiber Interface	N/A
Max. User Access	28 users
Smart Phone	iPhone, iPad, Android
Interoperability	ONVIF, SDK, CGI Conformant

Storage

Internal HDD	1 SATA III Port, up to 6TB capacity for each HDD
HDD Mode	Single
eSATA	N/A

Auxiliary Interface

USB	2 ports (2 Rear USB2.0)
RS232	N/A
RS485	N/A

Electrical

Power Supply	Single, DC12V/2A
Power Consumption	<4W (without HDD)

Environmental

Operating Conditions	-10°C ~ +55°C (+14°F ~ +131°F), 86 ~ 106kpa
Storage Conditions	-20°C ~ +70°C (-4°F ~ +158°F), 0 ~ 90% RH

Construction

Dimensions(W×D×H)	Smart 1U, 204.6mm×204.6mm×45.2mm (8.055" x 8.13" x 1.78")
Net Weight	0.43kg (0.95 lb) (without HDD)
Gross Weight	1.07kg(2.36 lb)(without HDD)



Certifications

CE	EN55032, EN55024, EN50130-4, EN60950-1
FCC	Part 15 Subpart B, ANSI C63.4-2014


Ordering Information

Type	Part Number	Description
4 Channel NVR	NVR1B04	4 Channel Smart 1U H.265 Network Video Recorder
8 Channel NVR	NVR1B08	8 Channel Smart 1U H.265 Network Video Recorder
Accessories	N/A	N/A

Dimensions (mm)

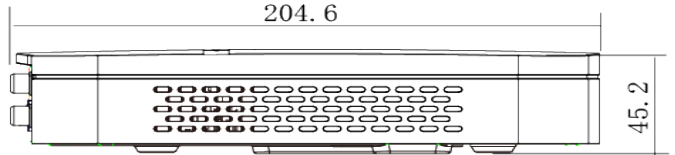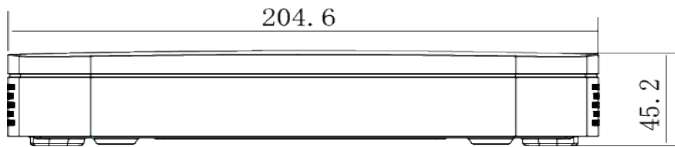

Rear Panel

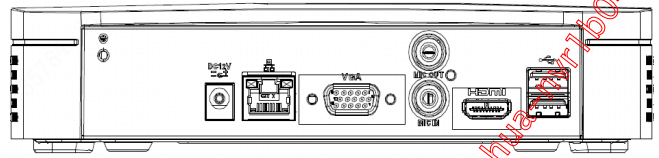

<https://www.e-camere.ro/supraveghere-video/dvr-nvr-uri/Dahua/nvr-4-canale-ip-2mp-bitrate-48-mbps-dahua-nvr-1b04/>