

Isis Series (Isis 1500L & Isis 2000L)


PN: PWUP-LI150IS-AZ01B / PWUP-LI200IS-AZ01B

EAN: 6422956004118 / 6422956004125

The office guardian



4x
4 Schuko Outlets
with protection



RJ11/RJ45 outlet
protection



LCD Display



★ Features

- ⊕ Boost and buck AVR for voltage stabilization
- ⊕ Auto restart while AC is recovering
- ⊕ Simulated sine wave
- ⊕ Off-mode charging
- ⊕ Green topology, saving 50% energy than others at AC mode
- ⊕ Built-in super smart charger, 90% fully charged in 4 hours
- ⊕ Charging ability at low input voltage, 2 times more powerful than others
- ⊕ Excellent microprocessor control guarantees high reliability
- ⊕ Built-in USB communication port and RJ-45 / RJ11 surge protection
- ⊕ Easy replacement battery compartment
- ⊕ Provides battery backup and surge protected outputs
- ⊕ Software Management (ViewPower)
- ⊕ Low noise Transformers
- ⊕ Cold start function

📋 Specifications

Capacity	Isis 1500L - 1500 VA/900W Isis 2000L - 2000VA/1200W	Waveform (Batt. Mode)	Simulated Sine Wave
Type	Line Interactive	Indicators Type	
Input		LCD Display	AC Mode, Battery Mode, Load Level, Battery Level, Input Voltage, Output Voltage, Overload, Fault, and Low Battery
Voltage	230 VAC	Alarm	
Voltage Range	162-290 VAC	Battery Mode	Sounding every 10 seconds
Frequency Range	60/50 Hz (auto sensing)	Low Battery	Sounding every second
Output		Overload	Sounding every 0.5 second
AC Voltage Regulation (Batt. Mode)	±10%	Battery replacement alarm	Sound every 2 seconds
Frequency Range (Batt. Mode)	60 Hz or 50 Hz ±1 Hz	Fault	Continuously sounding
Transfer Time	Typical 2ms (maximum 6ms)		

Protection

Outlets type	(4x) SHUCKO Battery Backup & Surge Protection
Full protection	RJ-11 / RJ-45 input spike protection Overload, Discharge and Overcharge protection
Management	
Connection port	USB

Software capability	Monitor & Control over USB, LAN or Internet
Environment	
Humidity	0-90 % RH @ 0- 40°C (non-condensing)
Noise Level	Less than 40dB

Model

Isis 1500L

Isis 2000L

Physical

Dimension (D X W X H)

397 x 146 x 205mm

Battery

Battery Type & Number

12V 9Ah x 2

12V 9Ah x 2

Typical Recharge Time

4-6 hours up to 90% capacity

Battery Voltage

24V


24V


Running time on battery
(minutes)

25% Load - 22 min
50% Load - 7.5 min
75% Load - 3 min
100% Load - 2 min

25% Load - 17 min
50% Load - 6 min
75% Load - 3 min
100% Load - 2 min

Running time on battery Isis 1500L

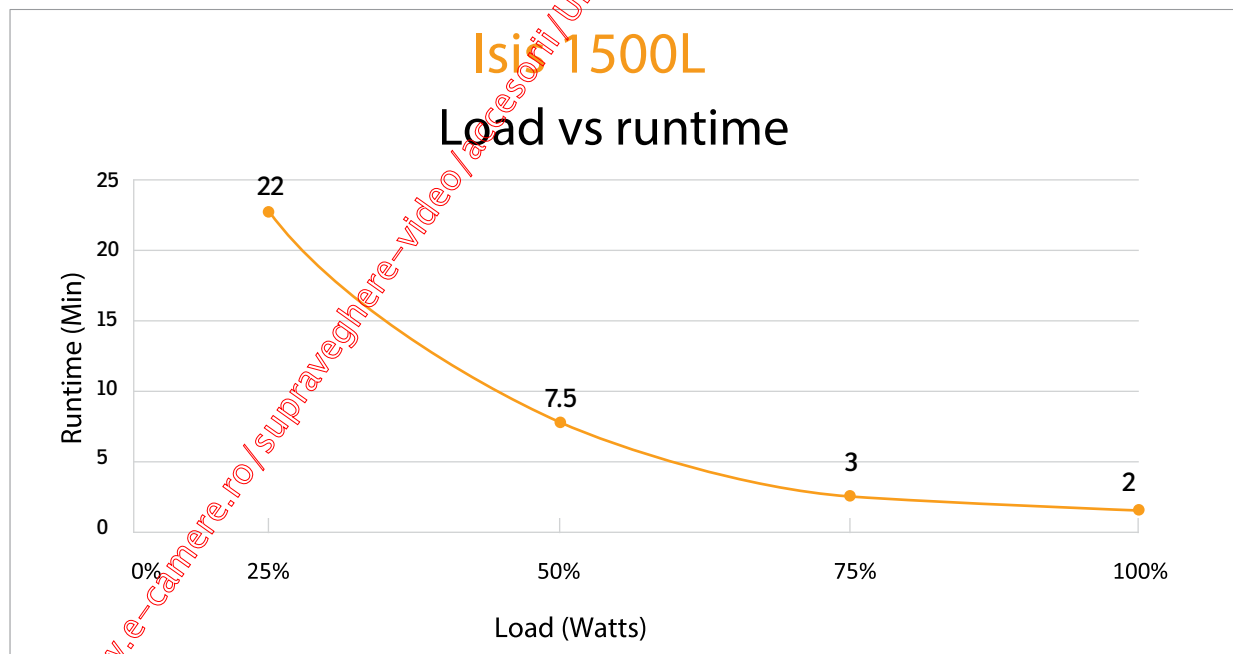

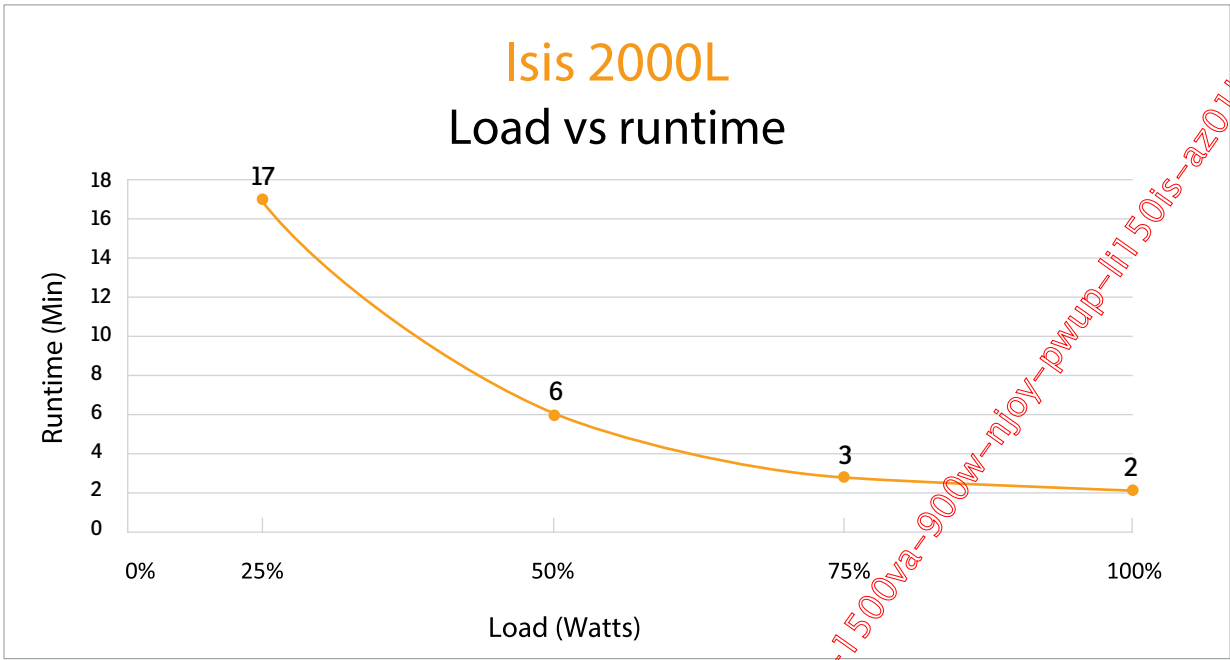

🚚 Logistics

📦 Carton Box Size	490 x 230 x 290 mm - Isis 1500L & Isis 2000L
📦 Pieces in the Carton Box	1 pcs / ctn
⚖️ Net & Gross weight / CTN	N.W. / G.W.: 10.6 kg / 11.6 kg - Isis 1500L N.W. / G.W.: 11.5 kg / 12 kg - Isis 2000L

🏆 Certificates

