


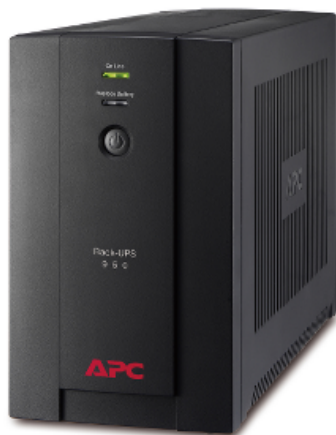

Overview

Model Name	APC Back-UPS 950VA, 230V, AVR, IEC Sockets
Includes	User Manual
Standard Lead Time	Usually in Stock
Product Distribution	Afghanistan , Albania , Algeria , Andorra , Angola , Armenia , Austria , Azerbaijan , Bahrain , Belarus , Belgium , Benin , Bhutan , Bolivia , Bosnia And Herzegovina , Botswana , Brunei Darussalam , Bulgaria , Burkina Faso , Burundi , Cambodia , Cameroon , Central African Republic , Chad , Chile , Congo , CONGO, THE DEMOCRATIC REPUBLIC OF THE , Cook Islands , Cote D'Ivoire , Croatia , Cyprus , Czech Republic , Denmark , Djibouti , East Timor , Egypt , Equatorial Guinea , Eritrea , Estonia , Ethiopia , Fiji , France , Gabon , Gambia , Georgia , Germany , Ghana , Gibraltar , Greece , Guinea , Hungary , Iceland , Indonesia , Ireland , Israel , Italy , Jordan , Kazakhstan , Kenya , Kuwait , Latvia , Lebanon , Lesotho , Liberia , Liechtenstein , Lithuania , Luxembourg , Macedonia , Madagascar , Malawi , Malaysia , Mali , Malta , Martinique , Mauritania , Mauritius , Mayotte , Moldova , Republic Of , Mongolia , Morocco , Mozambique , Myanmar , Namibia , Nepal , Netherlands , New Zealand , Niger , Nigeria , Oman , Pakistan , Papua New Guinea , Paraguay , Peru , Philippines , Poland , Portugal , Reunion , Romania , Russian Federation , Rwanda , Saudi Arabia , Senegal , Sierra Leone , Singapore , Slovakia (Slovak Republic) , Slovenia , Somalia , South Africa , Spain , Sri Lanka , Sudan , Suriname , Tajikistan , TANZANIA, UNITED REPUBLIC OF , Thailand , Togo , Tunisia , Turkey , Turkmenistan , Turks And Caicos Islands , Uganda , Ukraine , United Arab Emirates , Uruguay , Uzbekistan , Viet Nam , Western Sahara , Yemen , Zambia , Zimbabwe

Output

Output Power Capacity	480 Watts / 950 VA
Max Configurable Power (Watts)	480 Watts / 950 VA
Nominal Output Voltage	230V
Output Frequency (sync to mains)	50/60 Hz +/-1 Hz
Output Frequency (sync to mains)	Line Interactive
Waveform Type	Stepped approximation to a sinewave
Output Connections	(1) IEC Jumpers (Battery Backup) , (6) IEC 320 C13 (Battery Backup)

Input

Nominal Input Voltage	230V
Input Frequency	50/60 Hz +/- 3 Hz (auto sensing)
Input Connections	IEC-320 C14
Cord Length	1.22 meters

Input voltage range for main operations	150 - 280 V
Maximum Input Current	4 A
Input Breaker Capacity	7 A

Batteries & Runtime

Battery Type	Maintenance-free sealed Lead-Acid battery with suspended electrolyte : leakproof
Included Battery Modules	1
Typical recharge time	8 hour(s)

Communications & Management

Interface Port(s)	USB
Control panel	LED status display with On Line : On Battery : Replace Battery and Overload indicators
Audible Alarm	Alarm when on battery : distinctive low battery alarm : overload continuous tone alarm

Surge Protection and Filtering

Surge energy rating	273 Joules
Data Line Protection	RJ-11 Modem/Fax protection

Physical

Maximum Height	215.0 mm
Maximum Width	130.0 mm
Maximum Depth	336.0 mm
Net Weight	8.0 kg
Shipping Weight	8.99 kg
Shipping Height	295.0 mm
Shipping Width	245.0 mm
Shipping Depth	440.0 mm
Color	Black

Environmental

Operating Environment	0 - 40 °C
Operating Relative Humidity	0 - 95% non-condensing %
Operating Elevation	0-3000 meters
Storage Temperature	-15 - 45 °C
Storage Relative Humidity	0 - 95% non-condensing %
Storage Elevation	0-9000 meters
Audible noise at 1 meter from surface of unit	45.000 dB

Conformance

Approvals	A-tick , C-tick , CE , IEC 62040-1-1 , RCM , Telepermit
Standard warranty	2 years repair or replace

Sustainable Offer Status

RoHS	Compliant
REACH	REACH: Contains No SVHCs