

ASL411S/ASL411S-D

Hotel Electronic Lock



Features


- Stainless steel panels and handles, sturdy and durable
- RF card
- Spare mechanical keys solve any emergency
- Lock failure/ Low voltage alarm
- Wireless installation
- The handle turns freely when access is not authorized
- Multi-management

ASL411S/ASL411S-D

Technical Specifications

Model	ASL411S	ASL411S-D
Card Technology	Mifare1 card (IC card)	T5557 card (ID card)
Working voltage	DC6V, alkaline battery (4 pcs)	
Power Consumption	Static<20uA, Dynamic<200uA	
Working Environment	-30~+60°C, 10%~80% RH	
Lock case	SUS304 Stainless steel	
Door thickness	40mm~70mm	
Package size	375*210*140mm	
Weight	2.7Kg	

Dimensions (mm)

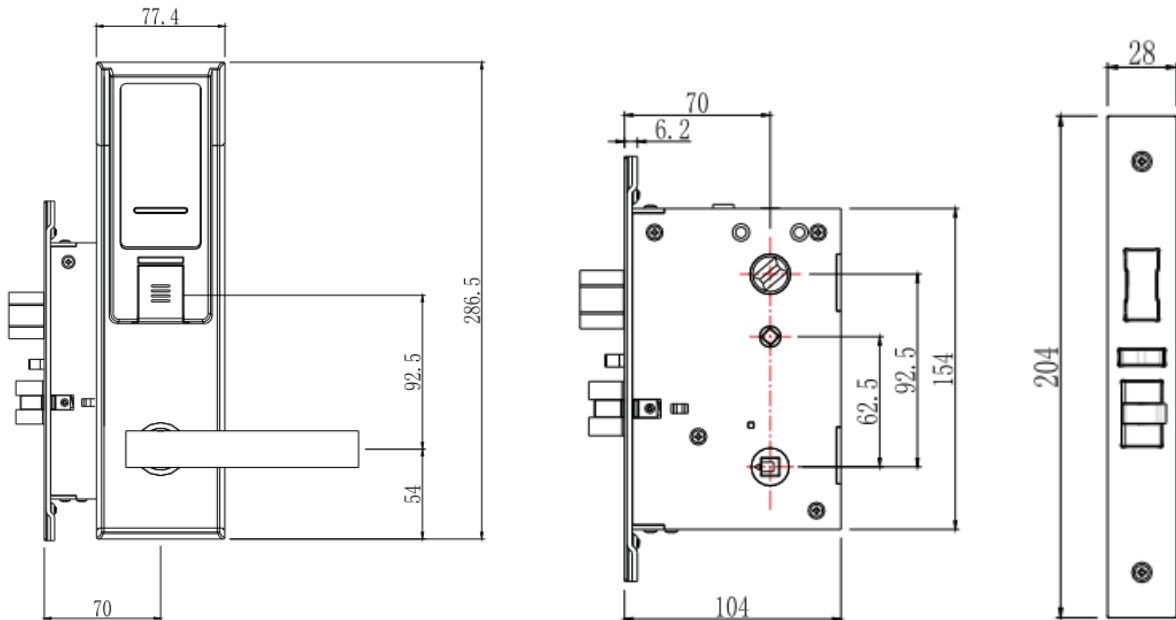

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-0571-87688883

Fax: +86-0571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.