


VI-K43P IP Video Intercom Kit

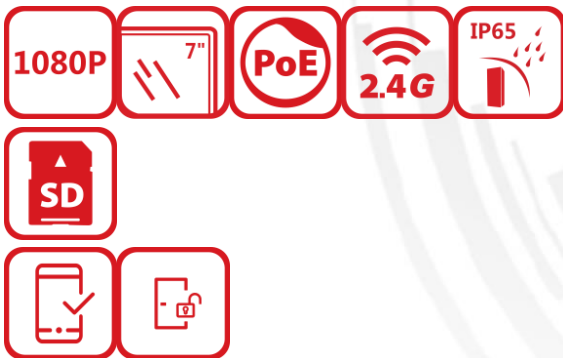

- One call button for easier calls
- Convenient Hik-Connect APP Mobile Control
- Standard PoE power supply
- IP65 protection level
- Including: VI-V400W × 1, VI-H460W × 1, PSU × 2

▪ Specification




Door station	
Operation system	Embedded Linux operation system
Flash	32 MB
RAM	256MB
Door station	
Supplement light	IR light, up to 3 m
Resolution	Main stream: 1920 × 1080p, 720p Sub stream: 640 × 480p
Lens	2MP HD camera
Wide dynamic range (WDR)	Support 120 dB
FOV	Horizontal: 131° Vertical: 78°
Video compression standard	H.264
Motion detection	Support
Door station	
Audio input	1 built-in omnidirectional microphone
Audio output	1 Built-in loudspeaker
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Audio compression standard	G.711 U
Audio compression Rate	64 Kbps
Door station	
Network protocol	TCP/IP, RSTP
Wi-Fi	2.4 GHz, IEEE802.11b, IEEE802.11g, IEEE802.11n
Door station	
RS-485	1
Network interface	1 RJ-45, 10/100 Mbps self-adaptive
RS-485	1
Alarm input	4
Lock control	1 relay, Max. 30 VDC 2 A
Exit button	1
Door contact input	1
Door station	
Button	1 physical button(s)
Power consumption	< 10 W
Working temperature	-40 °C to 55 °C(-40 °F to 131 °F)
Working humidity	10% to 95% (no-condensing)
Dimension	138 mm × 65 mm × 27 mm (5.4" × 2.6" × 1.1")
Installation	Surface mounting
Protection level	IP65
Indicator	2
Power supply	IEEE802.3af, standard PoE 12 VDC
Application environment	Outdoor

Weight	Net weight: 0.190 kg Gross weight: 0.414 kg
Indoor station	
Operation system	Embedded Linux operation system
Memory	128 MB
Flash	32 MB
Indoor station	
Display screen	7-inch colorful TFT screen
Display resolution	1024 × 600
Operation method	Capacitive touch screen
Indoor station	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
Audio quality	Noise suppression and echo cancellation
Audio compression standard	G.711 U, G.711 A
Volume adjustment	Adjustable
Audio compression Rate	64 Kbps
Indoor station	
Notice capacity	200
Linked indoor extensions capacity	16
Indoor station	
Wi-Fi	Wi-Fi 802.11 b/g/n
Protocol	TCP/IP, SIP, RTSP
Indoor station	
Network interface	1 RJ-45 10/100 Mbps self-adaptive
RS-485	1
Alarm input	8-ch alarm inputs
Alarm output	2
TF card	Max to 128 G
Indoor station	
Power consumption	≤ 8 W
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Power supply	12 VDC, IEEE802.3af, Standard PoE
Working humidity	10% to 90%
Dimension (L x W x H)	200 mm × 140 mm × 15.1 mm (7.9" × 5.5" × 0.6")
Installation	Wall mounting, table mounting
Application environment	Indoor

▪ Available Model

VI-K43P

Dimension

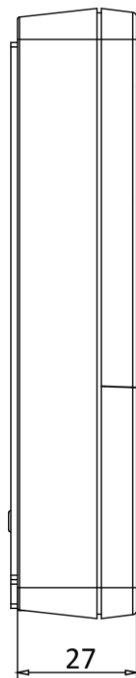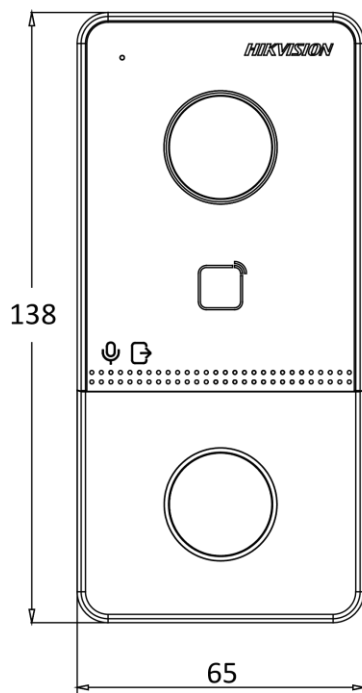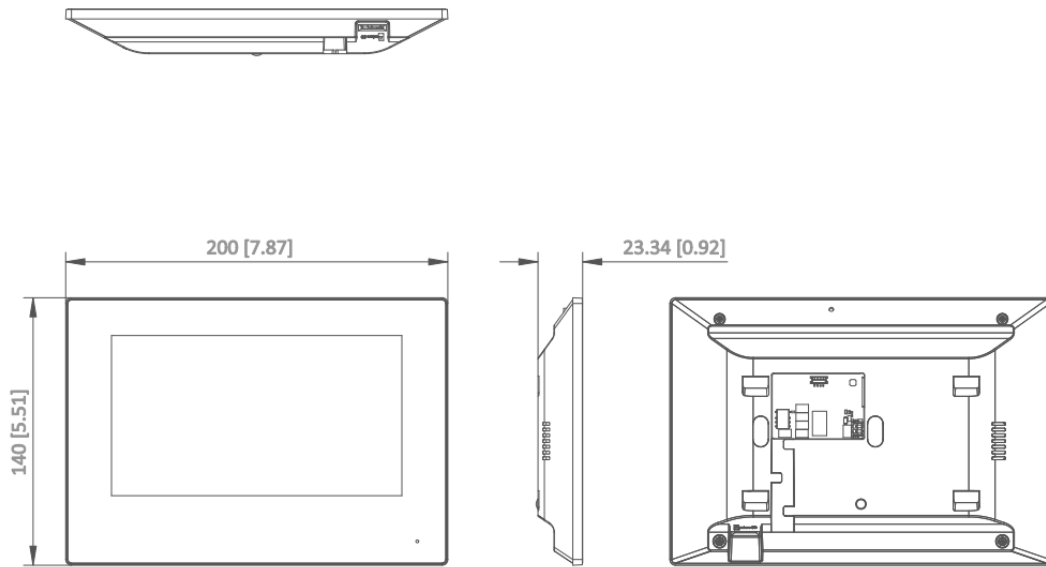

Unit:mm [inch]

SCALE	1:1
-------	-----

Unit:mm

- **Accessory**
- **Optional**



HiLook

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
Technical Support: support@hikvision.com

Follow us on social media to get the latest product and solution information.

