





D-WALL

D-META SERIES

600x450mm (WxD) - FLAT-PACK



HIGHLIGHTS

 IP20	Safety class rating IP20
	Available in heights from 4U up to 20U
	Load capacity up to 60 kg
	Supplied Flat-Pack

D-META FEATURES

- Safety class rating IP20
- Available in 4U, 6U, 9U, 12U, 15U, 18U and 20U heights
- Disassembled, flat-pack packaging
- Powder painted in RAL 7035 or RAL 9005
- Aluminum extruded glass door frame
- 4mm impact resistant smoked glass
- 3 grounding points (bottom, side panel and front door)
- Side panels: 2x sliding lock and a key lock and easily detachable
- 19" galvanized profile rails marked with U height position
- Roof is prepared for fan units (punched out entries)

PRODUCT OVERVIEW

D-Meta series wall mounted rack cabinets designed for superior performance and gives maximum performance on cabling and networking infrastructure, in addition it provides a very relative economy compared to its quality which is based on high technology industry. Supplied as flat pack.

D-Meta series is available in 4U, 6U, 9U, 12U, 15U, 18U and 20U heights with 600x450mm or 600x600mm sizes. Stability is the key factor of non-welded design. Side sections are detachable and installation on the wall is easy so it can be implemented quickly.

Lockable safety-glass door. 110° door opening angle. 1-point locking mechanism on the front door. 19" galvanized profile rails mounted on the front side inside of the cabinet.

There are cable entries on top (brushed) & bottom (pre-punched) chassis. Top case has a ready Forced Ventilation (Fan Module) integration area. This area is with pre-punched slots even without Fan integration provides passive heat removal function via convection.




D-META RACK 600x450mm (WxD)

P/N	U	COLOR	RAL	HEIGHT (mm)	WIDTH (mm)	DEPTH (mm)	NET WEIGHT (mm)	LOAD CAPACITY (kg)
DWM604504UG-FP	4	GREY	7035	228	580	450	6,6	60
DWM604506UG-FP	6	GREY	7035	317	580	450	9,8	60
DWM604509UG-FP	9	GREY	7035	440	580	450	14,8	60
DWM604512UG-FP	12	GREY	7035	584	580	450	19,7	60
DWM604515UG-FP	15	GREY	7035	707	580	450	24,6	60
DWM604518UG-FP	18	GREY	7035	851	580	450	29,5	60
DWM604520UG-FP	20	GREY	7035	940	580	450	32,8	60


P/N	U	COLOR	RAL	HEIGHT (mm)	WIDTH (mm)	DEPTH (mm)	NET WEIGHT (mm)	LOAD CAPACITY (kg)
DWM604504UB-FP	4	BLACK	9005	228	580	450	6,6	60
DWM604506UB-FP	6	BLACK	9005	317	580	450	9,8	60
DWM604509UB-FP	9	BLACK	9005	440	580	450	14,8	60
DWM604512UB-FP	12	BLACK	9005	584	580	450	19,7	60
DWM604515UB-FP	15	BLACK	9005	707	580	450	24,6	60
DWM604518UB-FP	18	BLACK	9005	851	580	450	29,5	60
DWM604520UB-FP	20	BLACK	9005	940	580	450	32,8	60



ISOMETRIC DRAWING

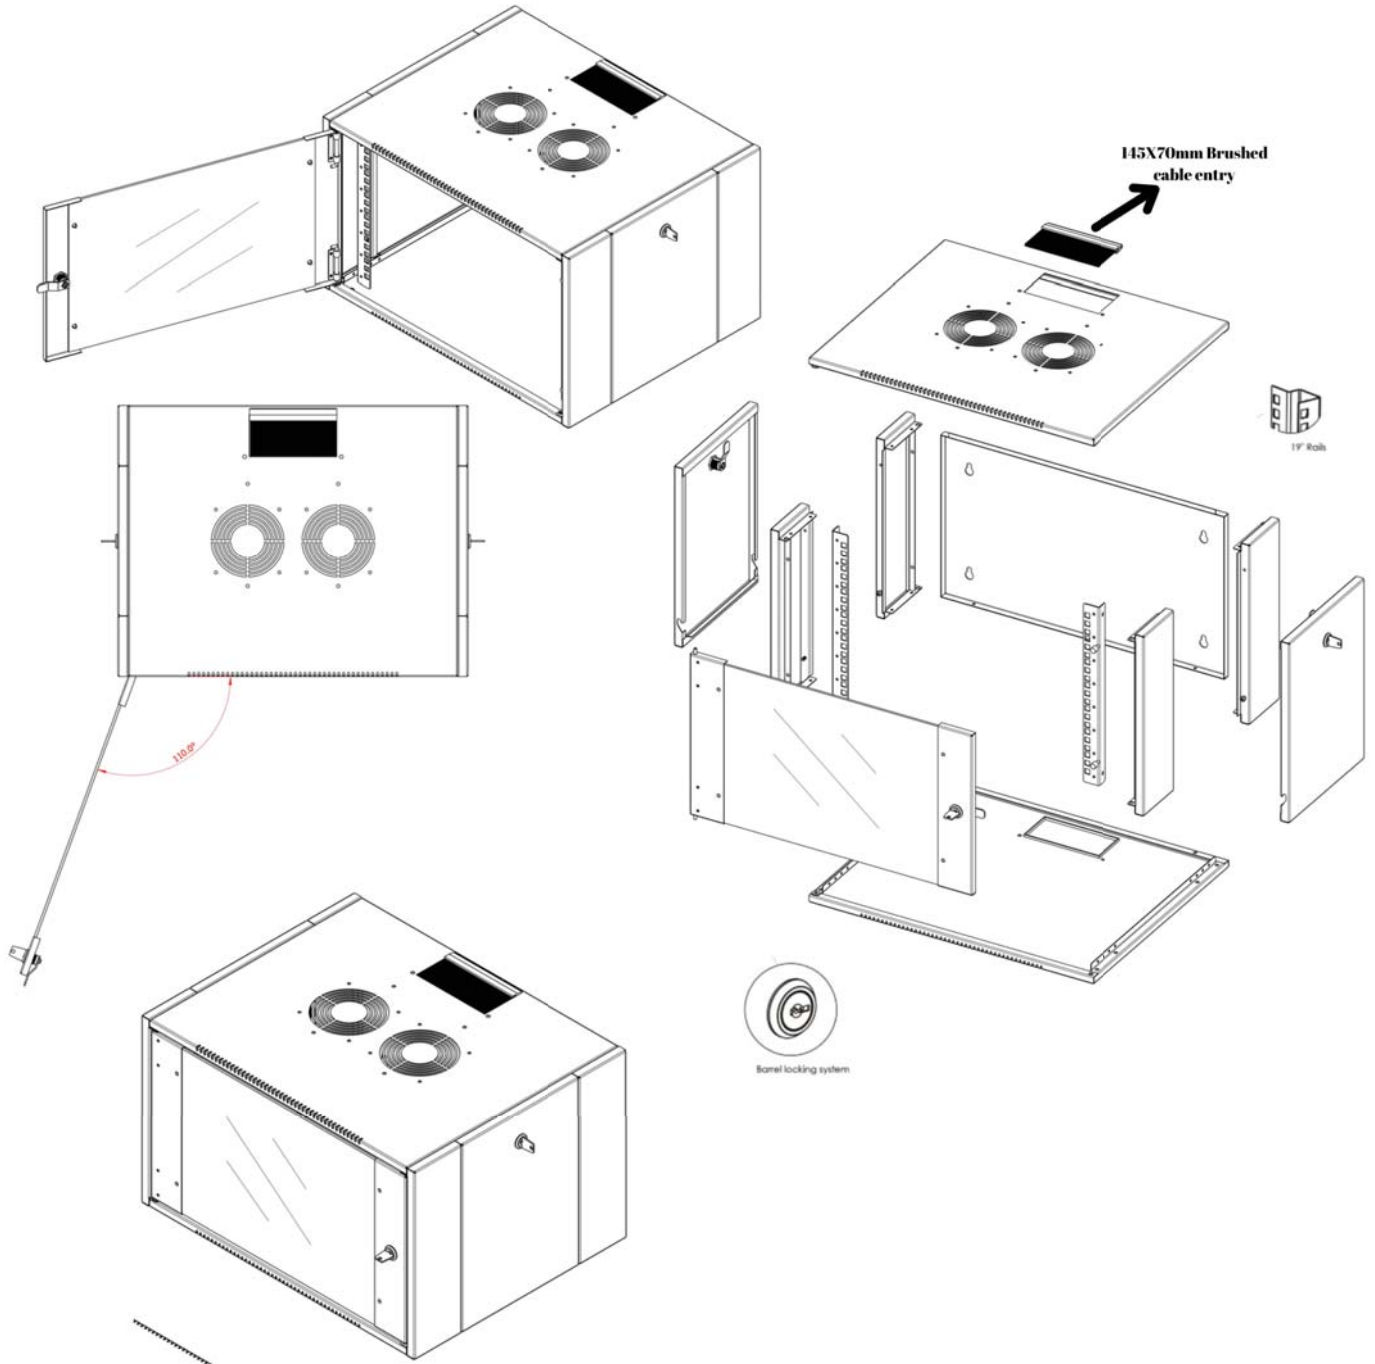

TECHNICAL DRAWING

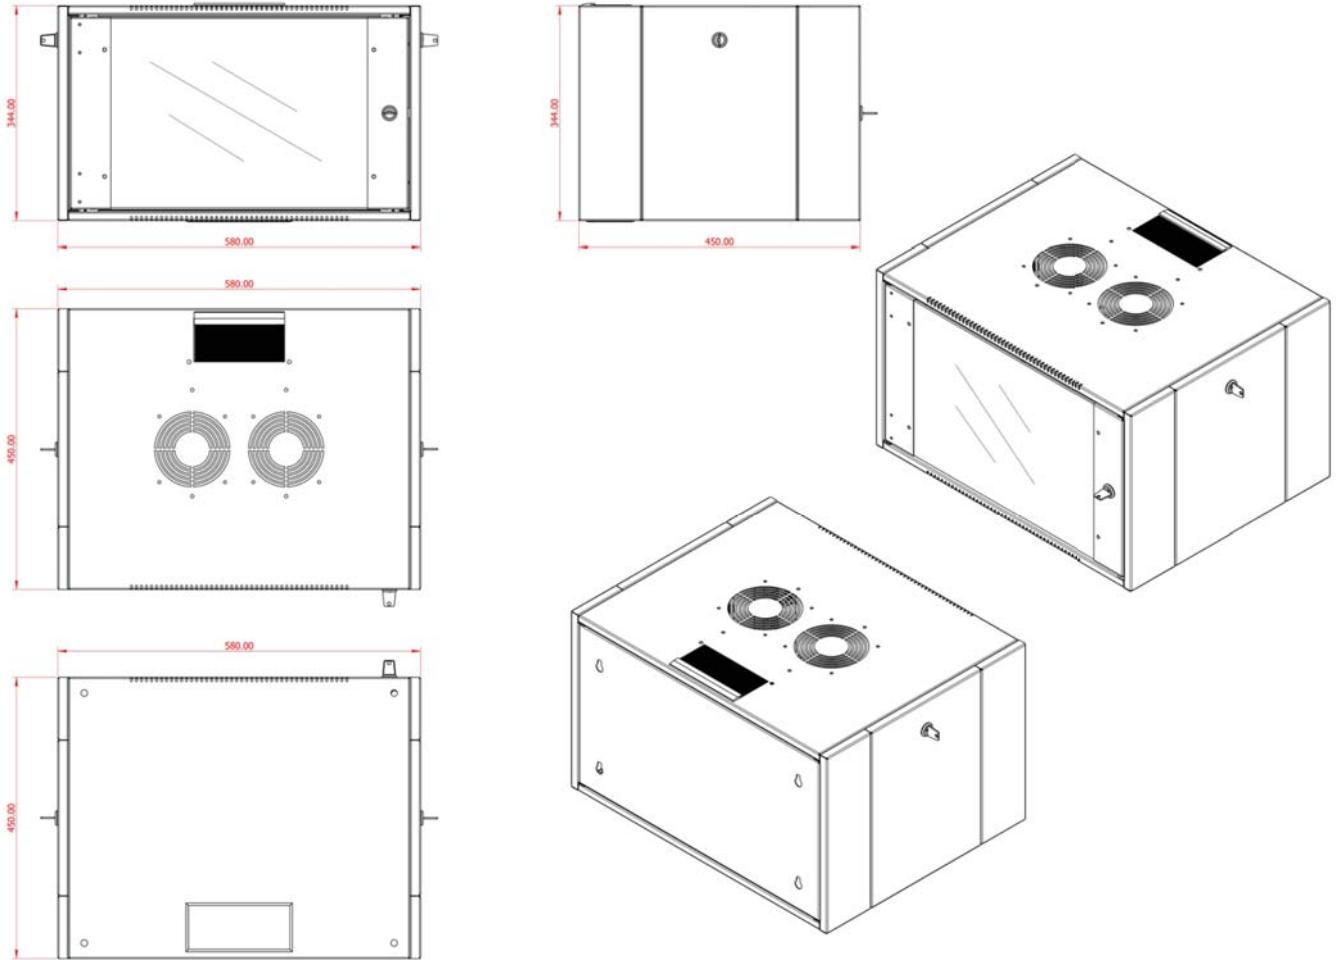

PACKAGING - FLAT PACK

