

DS-3E0105-O 5-Port Fast Ethernet Switch




- 5 × 10/100 M Adaptive RJ45 Ports
- Easy Plug-and-Play Installation
- Desk- Mounting and Wall-Mounting
- Rugged Metal Case, Exquisite and Beautiful Design


▪ Specification

| Model | | DS-3E0105-O |
|--------------------|---------------------------|---|
| Network Parameters | Ports | 5 × 10/100 Mbps PoE port |
| | MAC Address Table | 1 K |
| | Switching Capacity | 1 Gbps |
| | Packet Forwarding Rate | 0.75 Mpps |
| | Internal Cache | 0.448 Mbits |
| General | Shell | Metal material, fan-free design |
| | Net Weight | 0.15 kg (0.3307 lb) |
| | Gross Weight | 103.05 mm × 25.6 mm × 61.1 mm (4.06" × 1.01" × 2.41") |
| | Dimensions (W × H × D) | 0.3 kg (0.6615 lb) |
| | Operating Temperature | 0 °C to 40 °C (32 °F to 104 °F) |
| | Storage Temperature | -40 °C to 85 °C (-40 °F to 185 °F) |
| | Operating Humidity | 5% to 95% (no condensation) |
| | Relative Humidity | 5% to 95% (no condensation) |
| | Power Supply | 5 VDC, 1 A |
| | Max. Power Consumption | 5 W |
| | Power Consumption in Idle | < 5 W |
| Approval | EMC | FCC (47 CFR Part 15, Subpart B), CE-EMC (EN 55032: 2015+A11: 2020, EN IEC 61000-3-2: 2019, EN 61000-3-3: 2013+A1: 2019, EN 50130-4: 2011+A1: 2014, EN 55035: 2017+A11: 2020), IC (ICES-003: Issue 7:2020) |
| | Safety | UL (UL 60950-1), CB (AMD1:2009, AMD2:2013, IEC 62368-1: 2014 (Second Edition), CE-LVD (EN 62368-1: 2014+A11: 2017) |
| | Chemistry | CE-RoHS (2011/65/EU), WEEE (2012/19/EU), Reach (Regulation (EC) No.1907/2006) |

▪ Typical Application

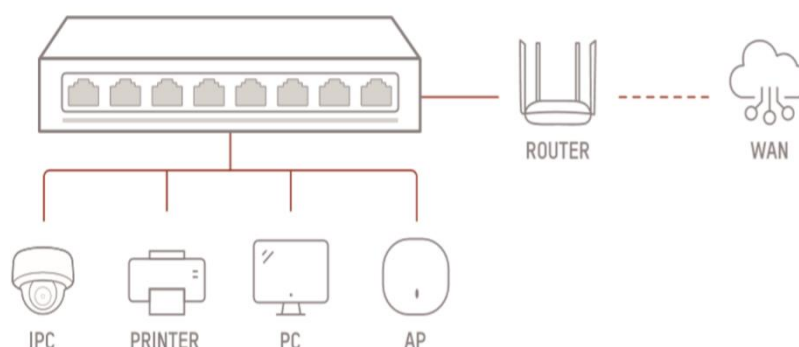

▪ Physical Interface


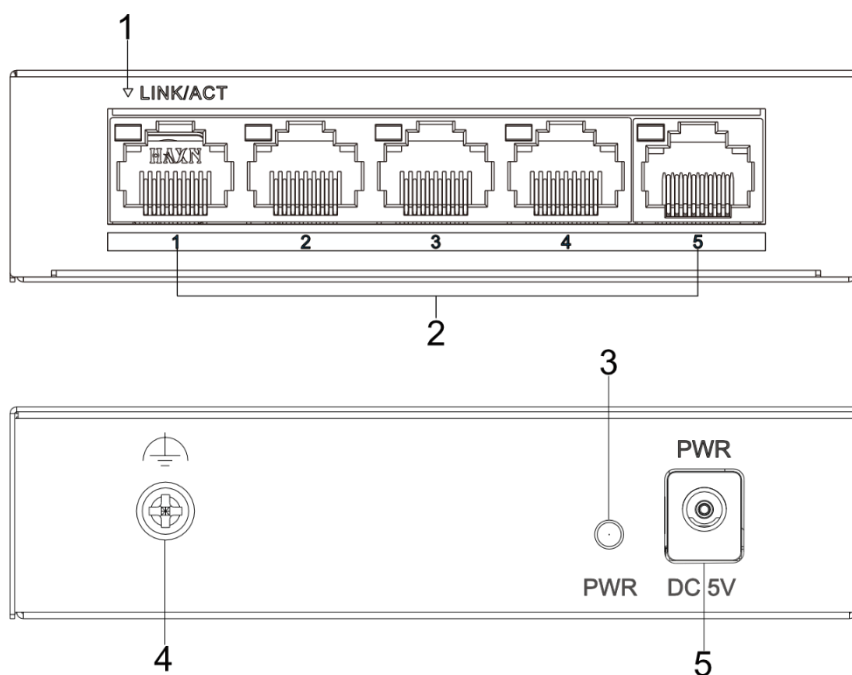


| No. | Indicator/Port |
|-----|-----------------------|
| 1 | LINK/ACT Indicator |
| 2 | 10/100 Mbps RJ45 Port |
| 3 | PWR Indicator |
| 4 | Grounding Terminal |
| 5 | Power Supply |

▪ Available Model

DS-3E0105-O

▪ **Dimension**

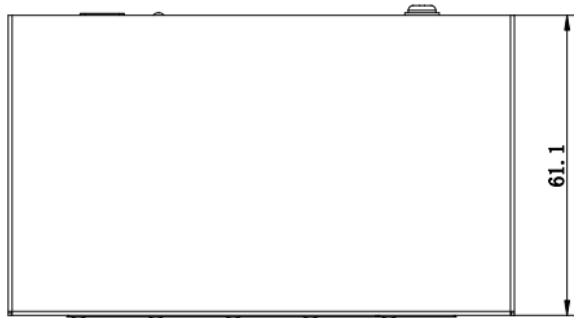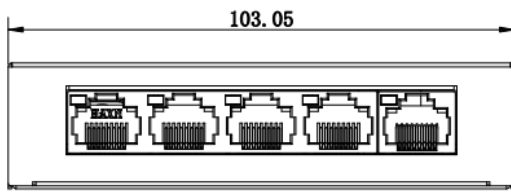

Unit: mm

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.

