

HWD-7104MH-G4 TURBO HD DVR

Key Feature

- Deep learning based human and vehicle targets classification of Motion Detection 2.0
- H.265 Pro+/H.265 Pro/H.265/H.264+/H.264 video compression
- HDTVI/AHD/CVI/CVBS/IP video inputs
- Audio via coaxial cable
- Up to 6-ch IP camera inputs (up to 8 MP)
- Up to 8 MP@8 fps encoding capability















• Deep learning based human and vehicle targets classification of Motion Detection 2.0

Compression and Recording

- H.265 Pro+ video compression improves encoding efficiency, and reduces data storage costs
- Support 8 MP@8 fps encoding

Storage and Playback

- 1 SATA interface (up to 10 TB capacity)
- Smart search for efficient playback

Network & Ethernet Access

- Compatible with major Wi-Fi dongle products in the market
- HIk-Connect & DDNS (Dynamic Domain Name System) for easy network management





Specification

Motion Detection 2.0					
Human/Vehicle Analysis	Deep learning-based motion detection 2.0 is enabled by default for all analog channels,				
	it can classify human and vehicle, and extremely reduce false alarms caused by objects				
	like leaves and lights;				
	Quick search by object or event type is supported;				
Recording					
Video Compression	H.265 Pro+/H.265 Pro/H.265/H.264+/H.264				
Encoding Resolution	8 MP/5 MP/3K/4 MP/3 MP/1080p/720p/WD1/4CIF/VGA/CIF				
	Main stream:				
Frame Rate	8 MP@8 fps/3K@12 fps/5 MP@12 fps/4 MP@15 fps/3 MP@18 fps				
	1080p/720p/WD1/4CIF/VGA/CIF@25 fps (P)/30 fps (N)				
	*: 8 MP@8 fps is only available for channel 1.				
	Sub-stream:				
	WD1/4CIF/CIF@25 fps (P)/30 fps (N)				
Video Bitrate	32 Kbps to 10 Mbps				
Dual-stream	Support				
Stream Type	Video, Video & Audio				
Audio Compression	G.711u				
Audio Bitrate	64 Kbps				
Video and Audio					
	2-ch (up to 6-ch)				
IP Video Input	Enhanced IP mode on:				
ir video iriput	4-ch (up to 8-ch), each up to 4 Mbps				
	Up to 8 MP resolution				
	Support H.265+/H.265/H.264+/H.264 IP cameras				
Analog Video Input	4-ch				
	BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection				
HDTVI Input	8 MP@15 fps, 8 MP@12.5 fps, 3K@20 fps, 5 MP@20 fps, 5 MP@12 fps, 4 MP@30 fps,				
	4 MP@25 fps, 3 MP@18 fps, 1080p@30 fps, 1080p@25 fps, 720p@60 fps, 720p@50				
	fps, 720p@30 fps, 720p@25 fps				
AHD Input	5 MP@20 fps, 4 MP@25 fps, 4 MP@30 fps, 1080p@25 fps, 1080p@30 fps, 720p@25				
	fps, 720p@30 fps				
HDCVI Input	4 MP@25 fps, 4 MP@30 fps, 1080p@25 fps, 1080p@30 fps, 720p@25 fps, 720p@30				
	fps				




CVBS Input	PAL/NTSC		
HDMI Output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
VGA Output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz		
Video Output Mode	HDMI/VGA simultaneous output		
Audio Input	1-ch, RCA (2.0 Vp-p, 1 KΩ)		
	4-ch via coaxial cable		
Audio Output	1-ch, RCA (Linear, 1 KΩ)		
Two-Way Audio	1-ch, RCA (2.0 Vp-p, 1 K Ω) (using the first audio input)		
Synchronous Playback	4-ch		
Network			
Total Bandwidth	96 Mbps		
Remote Connection	32		
Network Protocol	TCP/IP, PPPOE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS,		
	ONVIF		
Network Interface	1, RJ45 10M/100M self-adaptive Ethernet interfac		
Wi-Fi	Connectable to Wi-Fi network by Wi-Fi dongle through USB interface		
Auxiliary Interface			
SATA	1 SATA interface		
Capacity	Up to 10 TB capacity for each disk		
Alarm In/Out	N/A		
USB Interface	2 × USB 2.0		
General			
Power Supply	12 VDC, 1.5 A		
Consumption	≤ 15 W (without HDD)		
Working Temperature	-10 °C to +55 °C (+14 °F to +131 °F)		
Working Humidity	10% to 90%		
Dimension (W × D × H)	260 × 222 × 45 mm (10.2 × 8.7 × 1.8 inch)		
Weight	≤ 1.16 kg (without HDD, 2.6 lb.)		

Note:

Enhanced IP mode might be conflicted with smart events (motion detection 2.0) or other functions, please refer to the user manual for details.



Physical Interface

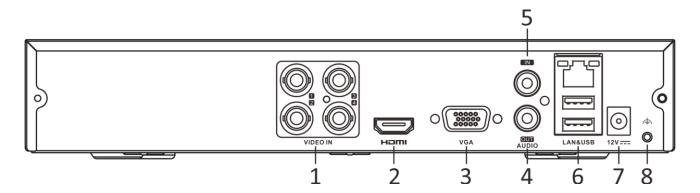

No.	Description	No.	Description
1	Video and coaxial audio in	5	AUDIO IN, RCA connector
2	HDMI interface	6	LAN network interface and USB interface
3	VGA interface	7	12 VDC power input
4	AUDIO OUT, RCA connector	8	GND

Available Model

HWD-7104MH-G4

Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998

Follow us on social media to get the latest product and solution information.





HikvisionHQ



HikvisionHQ



Hikvision_Global



