



# W8P

Buton de iesire mecanic cu montare aplicata, LED de stare bicolour si buzzer

## Imagine



YLI ETERNIT ACCES srl  
A.: HAIDUCULUI 3A, CLUJ-NAPOCA  
T.: +40 264 484989  
W.: www.yli.ro

W8P  
Buton de iesire mecanic cu montare aplicata,  
LED de stare bicolour si buzzer  
FISA TEHNICIA


## Caracteristici

- Carcasa din ABS
- Montare aplicata
- LED de stare bicolour si buzzer
- Contine un releu 3A/30Vcc
- Contact NO-COM-NC
- Testat la 500.000 de actionari


## Specificatii tehnice

• Alimentare:	12Vcc
• Actionare:	Mecanic
• Contacte:	NO-COM-NC
• Curent maxim:	3A/30Vcc
• LED de stare:	Rosu (stand-by), verde (actionare)
• Montare:	Aplicata
• Aplicabilitate:	Interior
• Material:	ABS
• Temperatura:	+10°C ~ +55°C
• Umiditate:	0 ~ 95 %, fara condensare
• Dimensiuni:	86(H) x86(L) x 14.2(A) mm
• Greutate:	0.1kg

## Conexiuni electrice

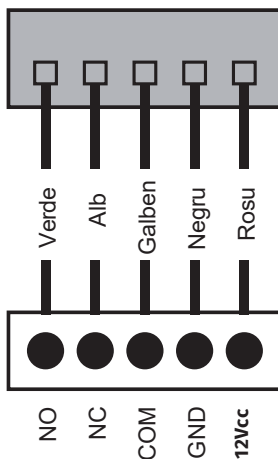

## Dimensiuni

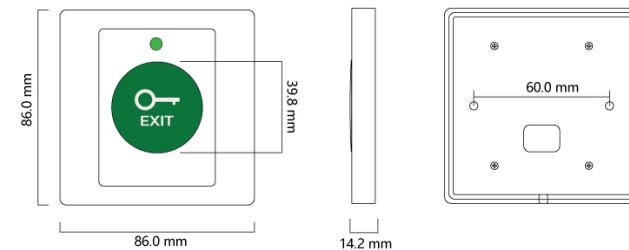

## Observatii



EEE FAC OBIECTUL UNEI  
COLECTARI SEPARATE

