

HD CCTV

Over Coax

1080P DISPLAY

1080P RECORD

1080P PLAYBACK



NAV-HD32PRO/4

<https://www.e-camere.ro/supraveghere-video/dvr-nvr-uri/Navaid/dvr-32-canale-2mp-4chhd-navaid-nav-hd-32pro-4/>




Introduction

NAV-HD32PRO/4 series are 32 CH 1080P high definition DVRs, which adopt the standard H.264 high profile compression format and the most advanced SOC technique to ensure real time recording in each channel and realize outstanding robustness of the system. NAV-HD32PRO/4 support 32 CH video input, 4 CH audio input, simultaneous 16 CH playback. The series of product can meet different security requirements of home, financial, commerce, enterprise, transportation and government, etc.


Characteristics

- 32 CH TVI / CVI / AHD video input
- 32 CH 1080P / 1080P lite / 720P / WD1 recording
- Adopt standard H.264 high profile compression format to get high-quality video at much lower bit rate
- Intuitive and user-friendly Graphics User Interface (GUI), window style operation by mouse
- Multi-mode recording: manual / timer / motion / sensor
- Playback : 16 CH simultaneously playback
- Search: time slice, time, event (manual, sensor, motion), tag search
- Express and flexible backup via USB, network and so on
- Pentaplex: preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol, IE browse and CMS supported
- Remote control via IE or CMS : preview, playback, backup, PTZ and configuration
- Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- Multi-user online simultaneously
- Authorization management, log review and device status review
- HDMI 1080P output, true high resolution display
- Support PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Support NAT function and QRCode scanning by mobile phone and PAD
- Powerful smart phone & Pad surveillance with iOS and Android OS

Dimensions

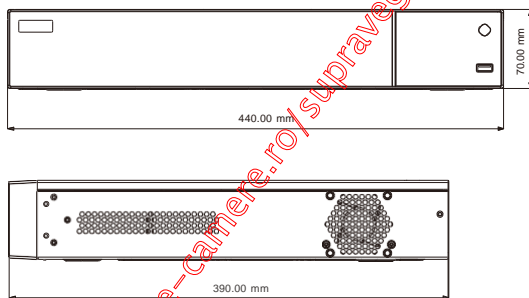

Rear Panels

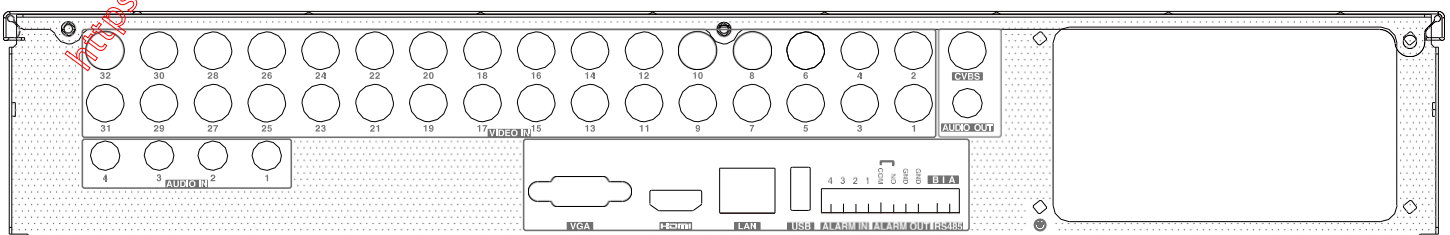

Specification

Model		NAV-HD32PRO/4
System	Compression	Standard H.264 High Profile
	CPU	Cortex A9
	OS	Embedded Linux
Video	Input	BNC × 32
	Resolution	TVI / CVI / AHD 1080P, 720P, WD1 real time
	Output	HDMI × 1 : 1920 × 1080, VGA × 1 : 1920 × 1080, BNC × 4 : CVBS (used as the main or spot output)
Audio	Input	RC × 4
	Output	RC × 1
	Two-way audio	Take up channel one audio input
Record	Resolution	1080P, 1080P lite, 720P, WD1
	Frame Rate	1080P : 12 fps (PAL) / 15 fps (NTSC) 1080P lite / 720P / WD1 : 25 fps (PAL) / 30 fps (NTSC)
	Bit Rate	768Kbps ~8Mbps
	Mode	Manual, timer, motion, sensor
Play back	Playback	16 CH
	Search	Time slice / time / event / tag search
	Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events
	Function	Play, pause, FF, FB, digital zoom, etc.
Alarm	Mode	Manual, sensor, motion, exception
	Input	4
	Output	1
Network	Triggering	Record, snap, preset, e-mail, etc.
	Interface	RJ45 10M / 100M / 1000Mbps × 1
	Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP
Web Client	Web Client	Multiple users online
	Mobile Device	OS
Storage	HDD	SATA × 4, max 6T per HDD
Backup	Local Backup	U disk, USB removable HDD
	Network Backup	Yes
Port	RS485	RS485 × 1, connect to PTZ or keyboard
	USB	USB 2.0 × 1 (front panel), USB 3.0 × 1 (rear panel)
	Remote Controller	Optional
Others	Power Supply	ATX250W
	Consumption	≤20W (without HDD)
	Dimensions (mm)	440 × 390 × 70 (W × D × H)
	Work Environment	-10 ~ 50 °C, 10% ~ 90% humidity