IPC-HFW2300R-Z

3Megapixel Full HD Network Water-proof IR-Bullet Camera

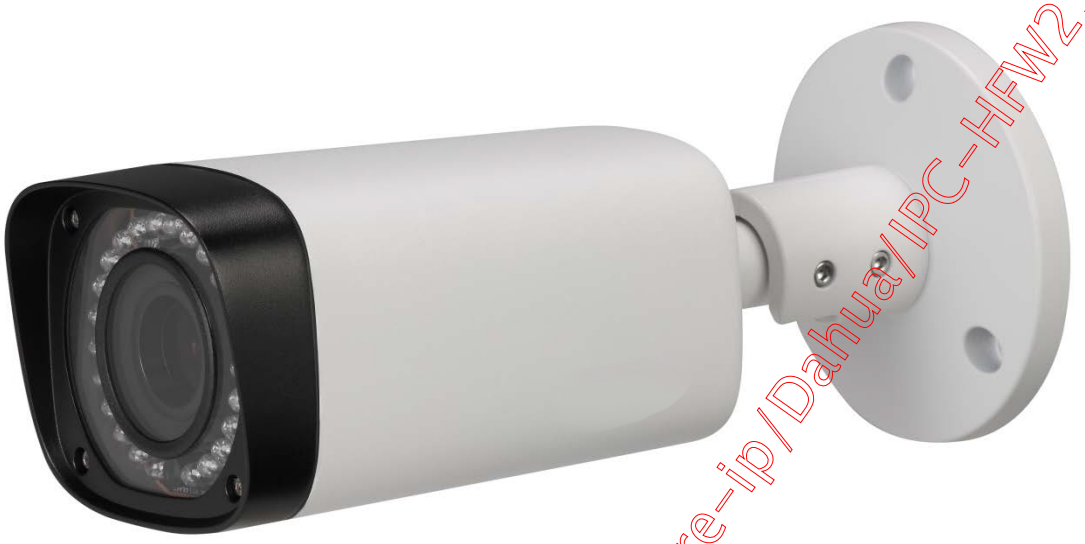

http://www.e-camera.ro/camere-supraveghere-ip/Dahua/IPC-HFW2300R-Z

Features

- 1/3" 3Megapixel progressive Aptina CMOS
- H.264 & MJPEG dual-stream encoding
- Max 20fps@3M(2048x1536)
- DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- 2.8~12mm varifocal lens
- Max IR LEDs Length 30m
- IP66, PoE

IPC-HFW2300R-Z

Technical Specifications

Model		IPC-HFW2300R-Z
Camera		
Image Sensor		1/3" 3Megapixel progressive scan Aptina CMOS
Effective Pixels		2048(H)x1536(V)
Scanning System		Progressive
Electronic Shutter Speed		Auto/Manual, 1/3(4)~1/10000s
Min. Illumination		0. 01Lux/F1.4 (Color), 0Lux/F1.4(IR on)
S/N Ratio		More than 55dB
Video Output		N/A
Camera Features		
Max. IR LEDs Length		30m
Day/Night		Auto(ICR)/Color/B/W
Backlight Compensation		BLC / HLC / DWDR
White Balance		Auto/Manual
Gain Control		Auto/Manual
Noise Reduction		3D
Privacy Masking		Up to 4 areas
Lens		
Focal Length		2.8mm~12mm
Max Aperture		F1.4
Focus Control		Auto
Angle of View		H: 92° ~ 28°
Lens Type		Motorized/Fixed Iris
Mount Type		Board-in Type
Video		
Compression		H.264/ H.264H/ MJPEG
Resolution		3M(2048x1536)/1080P(1920x1080)/1.3M(1280×960)/720P(1280×720)/D1(704×576/704×480)/CIF(352×288/352×240)
Frame Rate	Main Stream	3M(1 ~ 20fps)/1080P (1 ~ 25/30fps)
	Sub Stream	D1/CIF(1 ~ 25/30fps)
Bit Rate		H.264H: 40 ~ 8192Kbps; MJPEG: 40 ~ 16384Kbps
Audio		
Compression		N/A
Interface		N/A
Network		
Ethernet		RJ-45 (10/100Base-T)
Wi-Fi		N/A
Protocol		IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
Compatibility		ONVIF, CGI, PSIA
Max. User Access		20 users

http://www.e-camera.ro/camere-supraveghere-ip/Dahua/IPC-HFW2300R-Z

IPC-HFW2300R-Z

Smart Phone	iPhone, iPad, Android, Windows Phone
Auxiliary Interface	
Memory Slot	N/A
RS485	N/A
Alarm	N/A
PIR Sensor Range	N/A
General	
Power Supply	DC12V/PoE (802.3af)
Power Consumption	Max 8.5W
Working Environment	-30°C~+60°C, Less than 95% RH
Ingress Protection	IP66
Vandal Resistance	N/A
Dimensions	72mm×80mm×212.8mm
Weight	0.65kg

http://www.e-camere.ro/camere-supraveghere-ip/Dahua/IPC-HFW2300R-Z

IPC-HFW2300R-Z

Dimensions (mm)

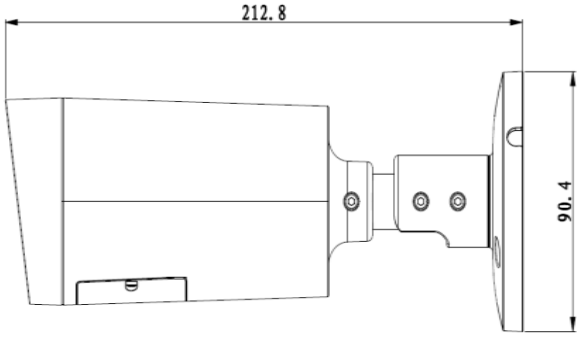

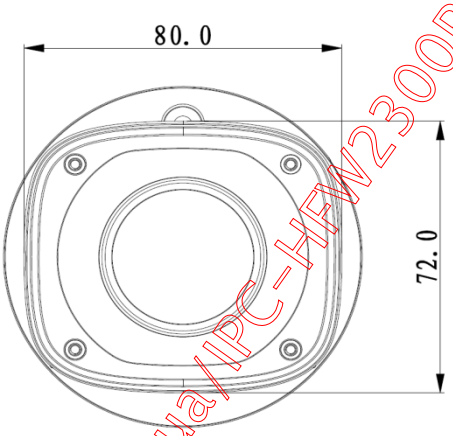

Accessory (optional)

PFA122

http://www.e-camere.ro/camere-supraveghere-ip/Dahua/IPC-HFW2300R-Z